




慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD

REVISION RECORD			
REV.	DESCRIPTION	ECN No.	APPROVED

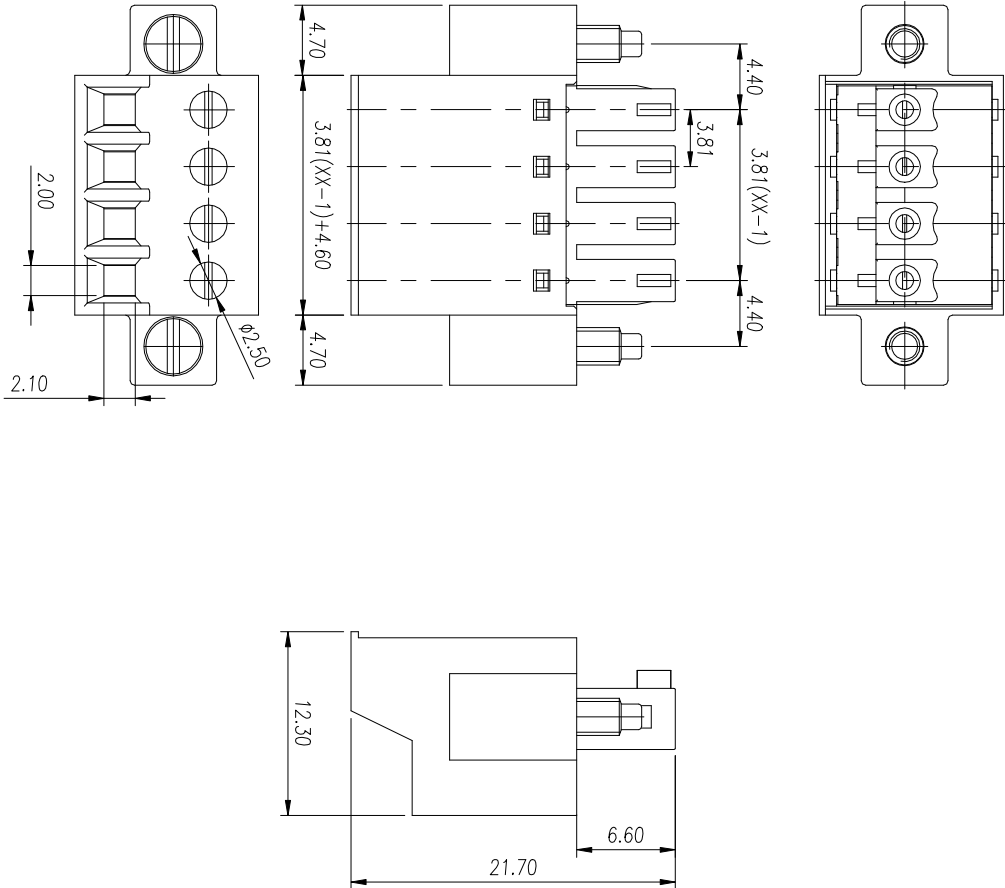

UL/CUL 技术参数				UL/CUL Technical Data				UL/CUL 技术参数									
等级	Use Group	B	C	D	等级	Use Group	B	C	D	等级	Use Group	B	C	D			
额定电压	Rated Voltage	[V]	300	-	300	额定电压	Rated Voltage	[V]	300	-	300	额定电压	Rated Voltage	[V]	300		
额定电流	Rated Current	[A]	8	-	8	额定电流	Rated Current	[A]	8	-	8	额定电流	Rated Current	[A]	8		
接线范围	Wire Range	28-16				接线范围	Wire Range	28-16				接线范围	Wire Range	28-16			
单/多芯线	Solid/Stranded	[AWG]	1600V/1Min			单/多芯线	Solid/Stranded	[AWG]	1600V/1Min			单/多芯线	Solid/Stranded	[AWG]	1600V/1Min		
耐电压	Withstanding Voltage	1600V/1Min				耐电压	Withstanding Voltage	1600V/1Min				耐电压	Withstanding Voltage	1600V/1Min			
IEC 技术参数																	
IEC Technical Data																	
过电压类别	Overvoltage Category	III	III	II	过电压类别	Overvoltage Category	III	III	II	过电压类别	Overvoltage Category	III	III	II			
污染等级	Contamination Class	3	2	2	污染等级	Contamination Class	3	2	2	污染等级	Contamination Class	3	2	2			
额定电压	Rated Voltage	[V]	160	160	320	额定电压	Rated Voltage	[V]	160	160	320	额定电压	Rated Voltage	[V]	160		
额定电流	Rated Current	[A]	7	7	7	额定电流	Rated Current	[A]	7	7	7	额定电流	Rated Current	[A]	7		
额定冲击电压	Impulse withstand voltage	[kV]	2.5	2.5	2.5	额定冲击电压	Impulse withstand voltage	[kV]	2.5	2.5	2.5	额定冲击电压	Impulse withstand voltage	[kV]	2.5		
导线截面积	Conductor cross section	0.5-1.5				导线截面积	Conductor cross section	0.5-1.5				导线截面积	Conductor cross section	0.5-1.5			
硬质/柔性导线	Solid/flexible	[mm²]				硬质/柔性导线	Solid/flexible	[mm²]				硬质/柔性导线	Solid/flexible	[mm²]			
材料																	
绝缘材料	Insulation Material	PA66				绝缘材料	Insulation Material	PA66				绝缘材料	Insulation Material	PA66			
阻燃等级	Inflammability	UL94V-0				阻燃等级	Inflammability	UL94V-0				阻燃等级	Inflammability	UL94V-0			
导体材料	Conductor Material	铜合金 Copper alloy				导体材料	Conductor Material	铜合金 Copper alloy				导体材料	Conductor Material	铜合金 Copper alloy			
导体表面镀层	Contactive Coating	镀镍 Ni Plated				导体表面镀层	Contactive Coating	镀镍 Ni Plated				导体表面镀层	Contactive Coating	镀镍 Ni Plated			
一般参数																	
Other Data																	
间距	Pitch /级数	Poles	3.81/02-24			间距	Pitch /级数	Poles	3.81/02-24			间距	Pitch /级数	Poles	3.81/02-24		
剥线长度	Stripping Length	[mm]	6-7			剥线长度	Stripping Length	[mm]	6-7			剥线长度	Stripping Length	[mm]	6-7		
螺丝	Screw/扭矩	Torque[N.m]	M2.0/2			螺丝	Screw/扭矩	Torque[N.m]	M2.0/2			螺丝	Screw/扭矩	Torque[N.m]	M2.0/2		
工作温度	Operating temperature	[°C]	40-105			工作温度	Operating temperature	[°C]	40-105			工作温度	Operating temperature	[°C]	40-105		
焊接温度	Soldering temperature		-			焊接温度	Soldering temperature		-			焊接温度	Soldering temperature		-		
引针尺寸	Pin Dimensions	[mm]	-			引针尺寸	Pin Dimensions	[mm]	-			引针尺寸	Pin Dimensions	[mm]	-		
PCB孔径	PCB Hole Diameter	[mm]	-			PCB孔径	PCB Hole Diameter	[mm]	-			PCB孔径	PCB Hole Diameter	[mm]	-		

linear dimension(Tolerances Standard GB/T 14486-2008)											
	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 10	over 10 to 100	over 100 to 100	over 100 to 100	over 100 to 100	over 100 to 100
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60	0.60

单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	2:1
第三视图/THIRD ANGLE PROJECTION					
名称 / TITLE	WJ15EDGKCM-3.81-XXP-1YY-00A				
版本 / REV	V0				



慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD